




Main Technical Parameters of Wheel Loader Model ZL06F (Automatic Transmission)

	Item	Parameters
Performance	Rated Load	600 kg
	Operating Weight	2600 kg
	Rated Bucket Capacity	0.3m ³
	Bucket Width	1100 mm
	Max. Breakout Force	28 KN
	Max. Dumping Height	2300 mm
	Max. Dumping Reach	750 mm
	Raising Time	≤ 4.0 s
	Hydraulic Cycle Time	9 s
	Min. Ground Clearance	240 mm
	Overall Dimensions (L x W x H)	4300*1410*2450 mm
	Min. Turning Radius	4600 mm
Engine	Model	CHANGCHAI ZN390Q
	Type	Horizontal, Water-cooled Evaporative, Three-cylinder Diesel Engine
	Rated Power	25 kW
	Rated Speed	2400 rpm
Transmission System	Transmission Mode	Automatic Transmission (with torque converter)
	Gear Shift	3 Forward, 1 Reverse
	Max. Speed	25 km/h
Drive Axle	Mode of Axle	130 Drive Axle
	Wheel Tread	970 mm
	Wheel Base	1800 mm
Drive	Mode	4-wheel Drive
Steering System	Full Hydraulic Steering System	BZZ-80
	System Working Pressure	10 Mpa
Brake System	Service Brake	Foot Pedal Hydraulic Expansion-shoe Brake on 4 Wheels
	Parking Brake	Hand Lever Flexible Shaft Controlled Disc Brake
Tyre	Type Specification	8.25-16-14PR
	Front Tyre Pressure	0.40 Mpa
	Rear Tyre Pressure	0.35 Mpa
Photo		

Standard Configuration:



Enclosed Cabin



Enclosed Cabin (Newly Designed)



Digital Radio + MP3 Player



Electric Fan



Heater



Adjustable Suspension Seat



Emergency Hammer



Fire Extinguisher



Rotating Beacon



Mechanical Joystick



**Mechanical Gear Shift Lever
(Automatic Transmission)**

**Optional EURO5 Engine:
18.4kw CHANGCHAI ZN390BT**

**Optional Wider Tyres:
31x15.5-15PR**











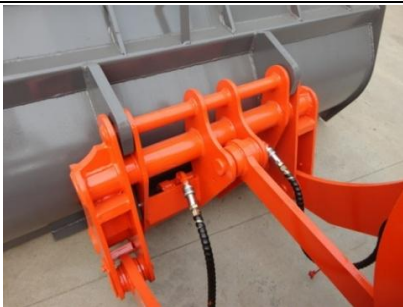



Extra Hydraulic Lines

LED Lights

Note:

1. The technical specifications are for standard models only.
2. Other optional accessories and requirements are available upon request.
3. All photos are for reference only. Machines shown may include optional parts.
4. All specifications and design characteristics are subject to change without prior notice.
5. For all available loader attachments, please refer to our Loader Attachments Catalogue.

Optional Parts and Functions:

		
Canopy	Open Cabin	FOPS/ROPS
		
Tilting Cabin (up to 30° for Easy Maintenance)	Hydraulic Joystick Control	Air Conditioner (Some Models Only)
		
Color Coded Electronic Gear Shift Button on Joystick	Gear Shift Lever with Electronic Control	Headlight Cover
		
Reversing Camera	Standard Quick Coupler/Quick Hitch /Quick Attach Coupler	Skid Steer (Bobcat) Quick Coupler/Quick Attach/Quick Hitch
		Note: Equipped with hydraulic quick coupler, your wheel loader can be easily and conveniently switched from one attachment to another to save your time and labor. Equipped with skid steer (Bobcat) quick coupler or Euro Standard quick coupler, you can use all your existing attachments with our wheel loader.
Euro Standard Quick Coupler	Number Plate	